

PRODUCT CATALOGUE

SUPPLEMENTARY RANGE



PROFIX



CAR PAINTS



MULTICHEM

1996

The beginning



2026

The Evolution

Three decades in colour innovation


Our company, **Multichem**, and the **Profix** brand, have been in business since 1996 and it should be mentioned that from the very beginning, every day we have been striving for quality, innovation, and excellence to confidently promote our Polish products on the global refinish markets.

Multichem was officially established by friends Piotr Muszkieta and Chris Welgraven, with the first employee Maciej Przybył, who remains a much-valued member of staff to this day.

The first **Profix** products (clearcoats, hardeners and thinners) were distributed only to the Polish market, however, owing to their very high-quality, these products quickly 'crossed borders' and as early as the second year of operation, the company was in cooperation with distributors in all four corners of Europe.

In 2004, our first **Colour Tool** was presented, and in 2005, due to the growth of the "Multichem family", we moved the company headquarters to Luboń. Just one year later, the first Polish waterborne system was developed, which proved a major success and made it necessary to expand our production and warehouse capacity. The following years were also marked by regular participation at Automechanika and many other trade fairs. In 2012, the American **Automotive Art** group became a co-owner of **Multichem**, allowing the expansion of products across the Atlantic Ocean.

In the early days, and to meet our customers' expectations, we used a **Mobile Training Centre**, which allowed our customers direct access to **Profix** technicians and provided excellent training anywhere in Poland and Europe. However, in 2019, the state-of-the-art **Profix - Automotive Art Global Training Centre** located in the company's new headquarters in Tarnowo Podgórne was opened. This futuristic facility allows our customers access to all Multichem products and technical information to ensure they are using the latest products, process, and the techniques to create real value for the companies they represent.

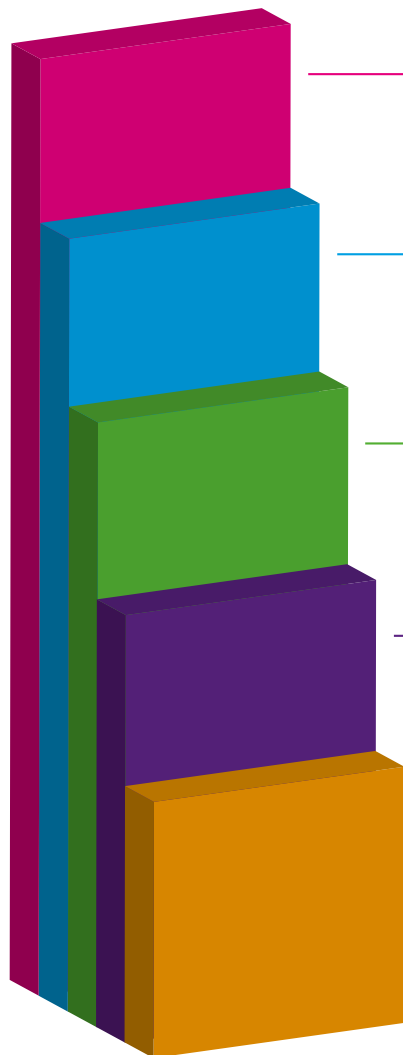

• LAYER 01. PRIMERS AND BODY FILLERS

P595 (CP 595) | P375 (CP 375) | P390 (CP 390) | P363 (CP 363) | P385 (CP 385) | P388 (CP 388) | P399 (CP 399) | P394 (CP 394) | P365 (CP 365) | B332 (CP 332) | B333 (CP 333) | B334 (CP 334) | B335 (CP 335) | B336 (CP 336) | B339 (CP 339) | B341 (CP 341) | B342 (CP 342)

• LAYER 02. MIXING SYSTEMS

Green-Line | A2G | KAR-BON | Acryl | LV Cryl

• LAYER 03. ADDITIVES TO THE SYSTEMS

F 014 | F 018 | LS 01/02/03 | Candy | StarDust | B 03 | 2-001 | Acryl 001 | Acryl 002 | Acryl 003 | DTM 370 | LV Cryl 0C2 | JetBlack

• LAYER 04. CLEARCOATS

C400 (CP 400) | C500 (CP 500) | C1500 (CP 1500) | C1800 (CP 1800) | C2008 (CP 2008) | C2014 (CP 2014) | C2015 (CP 2015) | C2016 (CP 2016) | CM 10

• LAYER 05. SUPPLEMENTARY RANGE

T010 (CP 010) | A011 (CP 011) | A012 (CP 012) | A014 (CP 014) | A015 (CP 015) | A016 (CP 016) | T032 (CP 032) | T040 (CP 040) | T041 (CP 041) | T044 (CP 044) | T048 (CP 048) | T055 (CP 055) | T066 (CP 066) | T070 (CP 070) | T075 (CP 075) | T078 (CP 078) | B004 | 1K Silver Line | Fast | Medium | Fine | Easy | Wax | Polishing pads | Polishing pads O.C.F | Body Guard | A582 (CP 582) | A325 (CP 325) | A998 (CP 998) | A999 (CP 999) | A480 (CP 480) | A490 (CP 490) | Profix mixing cups | Abrasives | Spectrophotometer A6

TABLE OF CONTENTS

LAYER 05. SUPPLEMENTARY RANGE

page 12	T010 (CP 010)	BASECOAT THINNER
page 13	A011 (CP 011)	WATERBORNE CLEANER
page 14	A012 (CP 012)	ANTI-STATIC CLEANER
page 15	A014 (CP 014)	ANTICRATER A2G
page 16	A015 (CP 015)	SILICONE REMOVER
page 17	A016 (CP 016)	SILICONE REMOVER SLOW
page 18	T032 (CP 032)	SPRAY PUTTY THINNER
page 19	T040 (CP 040)	THINNER 2K
page 20	T041 (CP 041)	2K FAST THINNER
page 21	T044 (CP 044)	THINNER 1K
page 22	T048 (CP 048)	THINNER 1K
page 23	T055 (CP 055)	MULTI-PURPOSE THINNER
page 24	T066 (CP 066)	FADE-OUT THINNER
page 25	T070 (CP 070)	2K SLOW THINNER
page 26	T075 (CP 075)	2K VERY SLOW THINNER
page 27	T078 (CP 078)	1K VERY SLOW THINNER
page 28	B 004	CONVERTER 1K ➡2K
page 29	1K Silver Line	1K SPECIAL-PURPOSE PAINT
page 30	Fast	POLISHING PASTE 1
page 31	Medium	POLISHING PASTE 2
page 32	Fine	POLISHING PASTE 3
page 33	Easy	ONE STEP POLISH COMPOUND
page 34	Wax	WAX
page 36	Pads	POLISHING SYSTEM
page 37	Pads O.C.F	POLISHING SYSTEM
page 38	Body Guard	BEDLINER HARD PROTECTIVE STRUCTURE
page 40	A582 (CP 582)	1K STRUCTURAL PAINT
page 41	UBS A325 (CP 325)	UNDERBODY PROTECTION AGENT

page 42	A998 (CP 998)	BLENDER FADE OUT BINDER
page 43	A999 (CP 999)	FADE OUT BINDER
page 44	A480 (CP 480)	ACCELERATOR
page 45	A490 (CP 490)	ELASTIC ADDITIVE
page 46	Paint cups	
page 47	Abrasives	
page 49	Spectrophotometer A6	

NOTES

[illegible]

PRODUCT CODES THAT TELL YOU MORE

Our product naming system is changing. Previously, all products were identified using the common prefix **CP**, regardless of their category, for example: **CP 399**, **CP 332**, **CP 2015** and **CP 3015**.

In the new system, the **CP** prefix is replaced by a letter indicating the product category. This makes products easier to identify, organize and select.

NEW PREFIX	PRODUCT CATEGORY	EXAMPLES OF NOTATION
P	PRIMER	P595, P394, P390, P363, P385, P388, P399, P375
B	BODY FILLER	B332, B333, B334, B335, B336, B339, B341, B342
C	CLEAR COAT	C400, C500, C1500, C1800, C2008, C2014, C2015, C2016, CM 10
H	HARDENER	H208, H208 S, H218, H245, H269, H282, H285, H286, H294, H3014, H3015, H3016, H3014 S, H3014 F, H3016 F
T	THINNER	T010, T032, T040, T041, T048, T055, T070, T075, T078
A	ANCILLARIES	A582, A998, A999

Previously:
CP 2015

New designation:
C2015

C2015
product category product number

NEW LABEL

New PROFIX logo

Product group

Key product features

Consistent colour scheme, e.g. for PRIMERS: grey graphics and pink elements.

Peel-off label

New MULTICHEM logo





x-rite
PANTONE®

05. SUPPLEMENTARY RANGE

The ever-increasing variety of metal and plastic substrates from which all kinds of vehicles are made can be overwhelming. However, for vehicles to stand apart from similar cars available, manufacturers are increasingly using several types of material on the same vehicle. This is why the **Profix Refinish System** Complementary Range was created - a wide range of products and tools for repairs from A to Z. The products are tailored to the requirements of modern fast-paced bodyshops and optimise the re-painting process, making it faster and more convenient. The materials these products are made of have been selected and developed for each stage of car refinishing work. Additionally, through numerous studies, the products will allow even better visual results while reducing costs and “key to key” times.



T010 (CP 010)

Basecoat thinner

CP 010 basecoat thinner is used for the **A2G** waterborne system. The product is designed for use at a temperature of 15-30°C.

Thinner is available in 0.5, 1 and 5 litre volume containers.

PACKAGING	
Volume	Collective packaging
0.5 l	11 pcs.
1 l	6 pcs.
5 l	3 pcs.



EFFICIENT



**EASY
APPLICATION**



**LONG MIXTURE
LIFE**



FOR 1K PRODUCTS



TEMPERATURE RANGE
15-30°C



APPLICATION
A2G waterborne system



POT LIFE
Ready-to-use product



MINIMUM SHELF LIFE
24 months in originally sealed packaging



A011 (CP 011)

Waterborne cleaner

CP 011 is a waterborne cleaner with a non-obnoxious odour that meets VOC emission standards. It is suitable for washing metal substrates, plastic substrates, primed substrates and previously painted surfaces that have been abraded.

The main purpose of the waterborne cleaner is to get rid of hard water deposits, minerals and grinding abrasion residue.

For best results, the product should be applied by spraying with an atomiser.

The product is available in 5-Litre tins.

PACKAGING	
Volume	Collective packaging
5 l	4 pcs.



ENVIRONMENTALLY
FRIENDLY



REMOVES DUST,
HARD WATER
DEPOSITS



EFFICIENT



FOR ATOMISER
APPLICATION



NO ODOUR



APPLICATION

- galvanised steel
- aluminium
- steel
- stainless steel
- old paintwork
- acrylic primers
- polyester putties



POT LIFE

Ready-to-use product



MINIMUM SHELF LIFE

24 months in originally sealed packaging



APPLICATION

The most effective method of applying the product is by using an atomiser.

After application, wipe the surface with a cloth



CLEANING

The product is suitable for cleaning spray guns and other accessories after residues of water-based paints



EVAPORATION TIME AFTER APPLICATION

~15-20 min after coating at 20°C and 65% relative humidity



A012 (CP 012)

Anti-static cleaner

CP 012 Anti-static Cleaner is designed for preparing plastic parts before painting, effectively discharging electrostatic charges that lead to dust accumulation. This cleaner not only degreases the surface but also eliminates silicone, all without an offensive odor.

CP 012 is especially recommended for plastic and glass surfaces. Available in 1-litre and 5-litre tins, **CP 012** provides versatile options for different project sizes, ensuring a convenient solution for your antistatic cleaning needs.

PACKAGING	
Volume	Collective packaging
1 l	6 pcs.
5 l	3 pcs.



DISCHARGES
ELECTROSTATIC
CHARGES



DEGREASES
SURFACES



INOFFENSIVE
SMELL



FOR ATOMISER
APPLICATION



APPLICATION

Removal of electrostatic charges from various surfaces



POT LIFE

Ready-to-use product



MINIMUM SHELF LIFE

24 months in originally sealed packaging



APPLICATION

The most effective method of applying the product is by using an atomiser. After application, wipe the surface with cloth



EVAPORATION TIME AFTER APPLICATION

5 min after coating at **20°C** and **65%** relative humidity



A014 (CP 014)

AntiCrater A2G

CP 014 additive is designed exclusively for **A2G** water-based paints. Through its properties, it allows reduction of surface tension, which is why it is used to eliminate the appearance of craters ('fisheye').

CP 014 is recommended for use when applying the first coat of paint.

The product is available in 1-litre tins.

PACKAGING	
Volume	Collective packaging
1 l	6 pcs.



ENVIRONMENTALLY
FRIENDLY



REDUCES SURFACE
TENSION



EFFICIENT



CONVENIENT
PACKAGING



POT LIFE
Ready-to-use product



MINIMUM SHELF LIFE
24 months in originally sealed
packaging



MIXING RATIO
100 parts of A2G + 5-6 parts of CP 014



APPLICATION
Standard for **A2G** system



**EVAPORATION TIME
AFTER APPLICATION**
10 min after coating at **20°C** and
65% relative humidity



A015 (CP 015)

Silicone remover

CP 015 silicone remover is designed for removing waxes and silicones as well as degreasing surfaces before painting. It also prevents formation of craters, larger inclusions and dirt in the applied coating.

Product is de-aromatised, so it does not have any offensive odour.

The product is available in 1 and 5-Litre tins.

PACKAGING	
Volume	Collective packaging
1 l	6 pcs.
5 l	4 pcs.



EFFICIENT



**DEGREASES
SURFACES**



**INOFFENSIVE
SMELL**



**FOR ATOMISER
APPLICATION**



APPLICATION

- galvanised steel
- aluminium
- steel
- stainless steel
- old paintwork
- acrylic primers
- polyester putties



POT LIFE

Ready-to-use product



MINIMUM SHELF LIFE

24 months in originally sealed packaging



APPLICATION

The most effective method of applying the product is by using an atomiser.

After application, wipe the surface with cloth



EVAPORATION TIME AFTER APPLICATION

~5 min after coating at 20°C and 65% relative humidity.



A016 (CP 016)

Silicone remover slow

CP 016 is a silicone remover designed to degrease large surfaces before painting at temperatures above 25°C. It also prevents formation of craters and eyelets, larger inclusions and dirt in the applied coating.

Product is de-aromatised, so it does not have any offensive odour.

The product is available in 1 and 5-Litre tins.

PACKAGING	
Volume	Collective packaging
1 l	6 pcs.
5 l	4 pcs.



EFFICIENT



**DEGREASES
SURFACES**



**INOFFENSIVE
SMELL**



**APPLICATION
ABOVE 25°C**



**FOR ATOMISER
APPLICATION**



APPLICATION

- galvanised steel
- aluminium
- steel
- stainless steel
- old paintwork
- acrylic primers
- polyester putties



POT LIFE

Ready-to-use product



MINIMUM SHELF LIFE

24 months in originally sealed packaging



APPLICATION

The most effective method of applying the product is by using an atomiser. After application, wipe the surface with cloth



EVAPORATION TIME AFTER APPLICATION

~10 min after coating at 20°C and 65% relative humidity



T032 (CP 032)

Spray putty thinner

CP 032 polyester putty thinner is designed for diluting **CP 332** spray putty. It ensures its proper application and drying, helps maintain the correct paint viscosity during spray application, such as flowability, working time, thixotropy (no sagging from vertical surfaces) and drying speed.

The product is available in 1-Litre tins.

PACKAGING	
Volume	Collective packaging
1 l	6 pcs.



EFFICIENT



ENHANCED
APPLICATION



LONG SHELF LIFE



FOR 2K PRODUCTS



APPLICATION

- polyester putties **CP 332**



POT LIFE

Ready-to-use product



MINIMUM SHELF LIFE

24 months in originally sealed packaging



T040 (CP 040)

Thinner 2K

CP 040 is an acrylic thinner for changing the viscosity of 2K products such as clearcoats, primers or **ACRYL** system products. The product is designed for use at 15-25°C. The product is available in 0.5, 1 and 5-Litre tins.

PACKAGING	
Volume	Collective packaging
0.5 l	6 pcs.
1 l	6 pcs.
5 l	4 pcs.



EFFICIENT



**EASY
APPLICATION**



LONG SHELF LIFE



FOR 2K PRODUCTS



TEMPERATURE RANGE
15-25°C



APPLICATION
- clearcoats
- **ACRYL** and **LV CRYL**
- acrylic primers
- epoxy primers



POT LIFE
Ready-to-use product



MINIMUM SHELF LIFE
24 months in originally sealed packaging



T041 (CP 041)

2K Fast Thinner

CP 041 is an acrylic thinner for changing the viscosity of 2K products such as clearcoats, primers or **ACRYL** system products. The product is designed for use at temperature below 15°C.

The product is available in 5-Litre tins.

PACKAGING	
Volume	Collective packaging
5 l	4 pcs.



EFFICIENT



**EASY
APPLICATION**



**LONG MIXTURE
LIFE**



FOR 2K PRODUCTS



**MULTIPLE
APPLICATIONS**



TEMPERATURE RANGE

<15°C



APPLICATION

- clearcoats
- **ACRYL** and **LV CRYL**
- acrylic primers
- epoxy primers



POT LIFE

Ready-to-use product



MINIMUM SHELF LIFE

24 months in originally sealed packaging



T044 (CP 044)

Thinner slow HS

CP 044 Thinner is purposefully designed for 2K products, as well as clearcoat products and paints. Offering flexibility in viscosity control based on operating temperature and repair range, this thinner is especially effective at temperatures exceeding 25°C.

For ease of use, **CP 044** is conveniently available in 1 and 5-Litre tins, providing a practical solution for adjusting viscosity and ensuring optimal performance in various painting applications.

PACKAGING	
Volume	Collective packaging
1 l	6 pcs.
5 l	4 pcs.



EFFICIENT



SLOW THINNER



LONG SHELF LIFE



FOR 2K PRODUCTS



TEMPERATURE RANGE

25-35°C



APPLICATION

- clearcoats
- **ACRYL** and **LV CRYL**
- acrylic primers
- epoxy primers



POT LIFE

Ready-to-use product



MINIMUM SHELF LIFE

24 months in originally sealed packaging



EVAPORATION TIME AFTER APPLICATION

It increases evaporation time for 2K products



T048 (CP 048)

Thinner 1K

CP 048 basecoat thinner is used for 1K solvent systems such as **KAR-BON** and **GREEN-LINE**. The product is designed for use at a temperature of 15-25°C.

The product is available in 0.5, 1 and 5-Litre tins.

PACKAGING	
Volume	Collective packaging
0.5 l	6 pcs.
1 l	6 pcs.
5 l	4 pcs.



EFFICIENT



**EASY
APPLICATION**



**LONG MIXTURE
LIFE**



FOR 1K PRODUCTS



TEMPERATURE RANGE
15-25°C



APPLICATION
- **GREEN-LINE** system
- **KAR-BON** system
- **SilverLine**
- **LS** line



POT LIFE
Ready-to-use product



MINIMUM SHELF LIFE
24 months in originally sealed packaging



T055 (CP 055)

Multi-purpose thinner

In our supplementary range, **CP 055** Multipurpose is a top-quality all-purpose thinner designed for thinning epoxy primers, acrylic primers, acrylic paint, and clearcoats. Recognized for its excellent compatibility with metallic colours, adhesion to standard drying times, and support for grain setting in **GREEN-LINE** and **KAR-BON**. This product, formulated from different solvent types, delivers optimal performance. Available in 1 and 5-Litre tins, it offers convenient choices for a variety of coating applications.

PACKAGING	
Volume	Collective packaging
1 l	6 pcs.
5 l	4 pcs.



EFFICIENT



LONG MIXTURE
LIFE



MULTIPURPOSE



SLOW THINNER



TEMPERATURE RANGE
20-30°C



APPLICATION

- clearcoats
- **GREEN-LINE**
- **ACRYL** and **LV CRYL**
- acrylic primers
- epoxy primers
- **KAR-BON** system
- **SilverLine**
- **LS** line



POT LIFE
Ready-to-use product



MINIMUM SHELF LIFE
24 months in originally sealed packaging



T066 (CP 066)

Fade-out thinner

CP 066 is a specialized thinner designed for blending two-component products, dedicated for both two-coat and single-coat bodywork methods. Its application is particularly effective for creating a blending effect (partial painting of the vehicle) with **ACRYL** pigment paint or clearcoat.

Best suited for precision work, **CP 066** excels in painting small areas, making it ideal for intricate applications like "smart" repairs. This product is available in practical 1-Litre tins, providing a convenient solution for precision painting needs.

PACKAGING	
Volume	Collective packaging
1 l	6 pcs.



EFFICIENT



FOR 2K PRODUCTS



SPRAY VISCOSITY

11-12 sec. DIN Flow Cup 4 mm



RECOMMENDED SIZES FOR PAINT STRAINER

190 µm



POT LIFE

Ready-to-use product



MINIMUM SHELF LIFE

24 months in originally sealed packaging



SUBSTRATE PREPARATION

The transition area is abraded with **P1500-P2000** grade paper or grey fleece with matting paste. Degrease the surface with silicone remover



MIXING RATIO

70 parts of **CP 066**
30 parts of 2K product



SPRAY GUN SETTINGS

Nozzle size: **1.2-1.4 mm**;
Operating pressure: HVLP/RP **1.8-2.0 bar**



APPLICATION

One coat is applied in several centimetre-long strips. The best effect is achieved with a small admixture of topcoat. It needs polishing after drying



EVAPORATION TIME AFTER APPLICATION

~4 min after coating at **20°C** and **65%** relative humidity



DRYING

Drying times at **20°C** and **65%** relative humidity: **~10-20 min**



T070 (CP 070)

2K slow thinner

CP 070 Thinner is purposefully designed for 2K products, as well as clearcoat products and paints. Offering flexibility in viscosity control based on operating temperature and repair range, this thinner is especially effective at temperatures exceeding 25°C.

For ease of use, **CP 070** is conveniently available in 1-Litre tins, providing a practical solution for adjusting viscosity and ensuring optimal performance in various painting applications.

PACKAGING	
Volume	Collective packaging
1 l	6 pcs.



EFFICIENT



SLOW THINNER



LONG SHELF LIFE



FOR 2K PRODUCTS



TEMPERATURE RANGE

25-35°C



APPLICATION

- clearcoats
- **ACRYL** and **LV CRYL**
- acrylic primers
- epoxy primers



POT LIFE

Ready-to-use product




MINIMUM SHELF LIFE

24 months in originally sealed packaging



EVAPORATION TIME AFTER APPLICATION

It increases evaporation time for 2K products

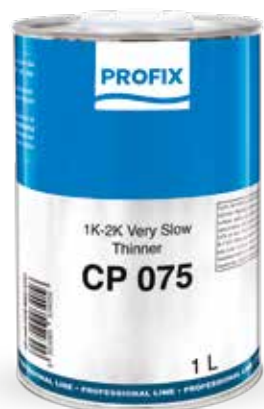

T075 (CP 075)

1K-2K very slow thinner

CP 075, the refined solution for precise viscosity control in 2K products, clearcoats, and paints. As a slower version compared to **CP 070**, it offers a gradual adjustment perfect for varied temperatures and repair ranges, especially excelling in temperatures over 30°C. Available in 1- and 5-litre tins for convenient viscosity adjustment, **CP 075** ensures optimal performance in diverse painting applications.

PACKAGING	
Volume	Collective packaging
1 l	6 pcs.
5 l	4 pcs.



EFFICIENT



**LONG SHELF
LIFE**



MULTIPURPOSE



SLOW THINNER



TEMPERATURE RANGE

30-40°C



APPLICATION

- clearcoats
- **GREEN-LINE**
- **ACRYL** and **LV CRYL**
- acrylic primers
- epoxy primers
- **KAR-BON** system
- **SilverLine**
- **LS** line



POT LIFE

Ready-to-use product



MINIMUM SHELF LIFE

24 months in originally sealed packaging



EVAPORATION TIME AFTER APPLICATION

It increases evaporation time for 2K products



T078 (CP 078)

1K slow thinner

CP 078 Thinner is expertly crafted for 1K basecoat systems, offering the flexibility to choose the appropriate operating viscosity of paints based on the operating temperature and the scope of the repair. Particularly effective at temperatures exceeding 25°C, this thinner is designed for versatile use.

To cater to various project sizes, **CP 078** is conveniently available in 1 and 5-Litre tins, ensuring a practical solution for adjusting viscosity and achieving optimal paint performance in a range of applications.

PACKAGING	
Volume	Collective packaging
1 l	6 pcs.
5 l	4 pcs.



EFFICIENT



LONG SHELF LIFE



FOR 1K PRODUCTS



SLOW THINNER



TEMPERATURE RANGE

25-30°C



APPLICATION

- GREEN-LINE
- KAR-BON system
- SilverLine
- LS line



POT LIFE

Ready-to-use product



MINIMUM SHELF LIFE

24 months in originally sealed packaging



EVAPORATION TIME AFTER APPLICATION

It increases evaporation time for 1K products



B 004

Converter 1K to 2K

Converter B 004 1K is an acrylic resin designed to convert the 1K **GREEN-LINE** and **KAR-BON** basecoat systems into 2K acrylic paint. Compatible with solid and metallic, pearl, and xirallic paints, the resulting paint is easy to apply and exhibits no tendency to be patchy or form streaks. The transformed effect is characterized by enhanced intensity. It's crucial to conduct a test panel, as the colour may differ from the original after conversion. Conveniently available in 1-Litre tins, Converter provides a practical solution for achieving the desired transformation in various painting applications.

PACKAGING	
Volume	Collective packaging
1 l	3 pcs.



SCRATCH-RESISTANT



EASY APPLICATION



INCREASED GLOSS



THICK COAT



COLOUR CHANGE



SPRAY VISCOSITY

~19-21 sec. DIN Flow Cup 4mm



RECOMMENDED SIZES FOR PAINT STRAINER

125-190 µm



POT LIFE

~ 6 hrs



DRY FILM THICKNESS

1 coat - ~25-30 µm



MINIMUM SHELF LIFE

B 004: 24 months in originally sealed packaging
H 004: 12 months in originally sealed packaging



VOC

2004/42/WE/IIIB(e)(840) 840



SUBSTRATE PREPARATION

Before painting, clean the coating with **CP 015** and **CP 011** remover. Old coatings are abraded with **P360-P400**



MIXING RATIO

step I: 1:2
100 parts of **KAR-BON**, **GREEN-LINE** or **SilverLine** + **200 parts** of **B 004**

step II: 4:1
100 parts of mixture (step 1) + **25 parts** of the hardener **H 004**
20-25% dilution for **KAR-BON**
30% dilution for **GREEN-LINE**, **SilverLine**
CP 040/ CP 070/ CP 075



SPRAY GUN SETTINGS

Nozzle size: **1.2-1.4 mm**,
 Operating pressure: HVP/ RP **1.8-2.0 bar**



APPLICATION

2 full coats or until full coverage is obtained. The top, final coat needs to be applied on reduced pressure for even particle orientation



EVAPORATION TIME AFTER APPLICATION

5 min after coating at **20°C** and **65%** relative humidity



DRYING

Drying times at **20°C** and **65%** relative humidity:
 - dust dryness: **10 min**
 - non-tacking: **15 min**
 - for assembly: **12 hrs**

Drying times at **60°C** and **65%** relative humidity:
 - for assembly: **30 min**

PROCESS

PROCESS

PROCESS



Silver Line

1K special-purpose paint

SilverLine 1K is an ideal choice for the renovation and repair of steel and light metal components, including rims and hub caps. Known for its excellent covering properties, rapid drying time, and easy application, **SilverLine** ensures a seamless finishing touch. This ready-to-use paint is offered in three different particle sizes, providing versatility in achieving desired effects.

Available in 1 and 3.5-Litre tins, **SilverLine** 1K offers a convenient solution for various project sizes, making it a practical choice for automotive renovation and repair applications.

PACKAGING	
Volume	Collective packaging
1 l	3 pcs.
3.5 l	2 pcs.



1K PRODUCT



HIGH COVERING
POWER



VARIOUS GRAIN
THICKNESS



READY-TO-USE
COLOUR



REPRODUCED IN
CHIP FORM



SPRAY VISCOSITY

17-19 sec. DIN Flow Cup 4 mm



RECOMMENDED SIZES FOR PAINT STRAINER

125-190 µm



PAINT EFFICIENCY

8-9 m²/l



COLOURS AVAILABLE:

- silver fine: **M9-0105.0**
- silver regular: **M9-0306.0**
- silver coarse: **M9-0459.0**



DRY FILM THICKNESS

1 coat - 5-10 µm



MINIMUM SHELF LIFE

36 months in originally sealed packaging



SUBSTRATE PREPARATION

Once the suitable primer coat has been abraded, clean using silicone remover **CP 015** in preparation to apply basecoat



MIXING RATIO

1:1
100 parts of **SilverLine** base
100 parts of thinner **CP 040/ CP 070/ CP 055/ CP 075**



SPRAY GUN SETTINGS

Nozzle size: **1.2-1.4 mm**
Operating pressure: **1.8-2.0 bar**
HVLP/RP spray gun



APPLICATION

2 full coats plus **1 coat** under reduced pressure for effect colours



EVAPORATION TIME AFTER APPLICATION

At **20°C** and **65%** relative humidity
5-10 min before application of clearcoat

PROCESS

PROCESS

PROCESS



Fast

Polishing paste 1

FAST Polishing Paste is a robust cutting polishing compound designed to effectively remove scratches and abrasive marks. Its straightforward application makes it especially recommended for swift and efficient work. Compatible with both pad and polishing flexipads, **FAST** paste delivers optimal results without the use of silicone.

Conveniently available in 1-Litre tins, **FAST** Polishing Paste provides a practical solution for various polishing tasks, ensuring a quick and effective approach to achieving a high-quality finish.

PACKAGING	
Volume	Collective packaging
1 l	6 pcs.



HIGH CUTTING
POWER



NO RESIDUES



HIGH OPERATING
SPEED



MULTIPLE
APPLICATIONS



MINIMUM SHELF LIFE

24 months in originally sealed packaging



APPLICATION

recommended pads



VERY HARD O.C.F
velcro



HARD
M14 thread



Medium

Polishing paste 2

The **MEDIUM** paste is perfect for refreshing surfaces, removing minor inclusions and small scratches. It works best on new and slightly worn surfaces. It does not contain silicone. The product is available in 1-Litre tins.

PACKAGING	
Volume	Collective packaging
1 l	6 pcs.



REFRESHED
SURFACE



NO INCLUSIONS



MINIMUM SHELF LIFE

24 months in originally sealed packaging



APPLICATION

recommended pads



HARD O.C.F.
velcro



HARD
M14 thread



Fine

Polishing paste 3

FINE is an exceptional finishing paste designed to eliminate polishing marks, holograms and tarnishing, making it ideal for application on fresh paintwork. For optimal results on larger areas, a machine polisher is recommended, while smaller patches can be efficiently finished manually. Silicone-free, **FINE** ensures a pristine finish without any unwanted residue.

Conveniently available in 1-Litre tins, **FINE** offers a practical solution for achieving a flawless finish and restoring the lustre of surfaces with ease.

PACKAGING	
Volume	Collective packaging
1 l	6 pcs.



REMOVES
HOLOGRAMS



FINISHING PASTE



MINIMUM SHELF LIFE

24 months in originally sealed packaging



APPLICATION

recommended pads



HARD O.C.F

velcro



SOFT O.C.F

velcro



SOFT

M14 thread



Easy

One Step Polish Compound

EASY is an efficient one-step paste formulated with highly effective abrasive particles, ensuring maximum surface polishing intensity. In a 'one-step' application, this single paste is designed to eliminate numerous scratches and achieve a glossy, hologram-free paintwork finish. Silicone-free and compatible with all commercially available paint systems, **EASY** offers versatility in its application.

For added convenience, **EASY** is available in 1-Litre tins, providing a practical solution for achieving a high-quality, scratch-free finish across a variety of paint systems.

PACKAGING	
Volume	Collective packaging
1 l	6 pcs.



EFFICIENT



MULTI-PURPOSE



ONE-STEP



DISINTEGRATING
GRAIN



REMOVES
HOLOGRAMS



MINIMUM SHELF LIFE

24 months in originally sealed packaging



APPLICATION

recommended pads
Don't add compound after
changing pads



HARD O.C.F
velcro



SOFT O.C.F
velcro



HARD O.C.F
velcro



SOFT
M14 thread



Wax

Wax

WAX Polishing is formulated to generate a thin film that enhances the intensity and clarity of the paint finish without leaving streaks. Ideal for both matt and gloss paints, this polishing wax is applied manually using a soft polishing pad for a precise and effective result.

For convenient use, **WAX Polishing** is available in 1-Litre tins, offering a practical solution for achieving a smooth and streak-free finish on a variety of paint surfaces.

PACKAGING	
Volume	Collective packaging
1 l	6 pcs.



NO STREAKS



REFRESHED
SURFACE



APPLICATION ON
MATT COATINGS



MANUAL APPLICATION



MINIMUM SHELF LIFE

24 months in originally sealed packaging



APPLICATION

Manual with polishing pad



SOFT O.C.F
velcro

PROFIX

New

POLISHING SYSTEM



Pads



Polishing system

The **polishing pad** with M14 thread is designed for all types of glossy surface paints. The product provides a better polishing effect and ensures long-lasting polishing results. The pad is made of robust materials, and its bonding process allows it to be washed in mild detergents. It is particularly designed for use in bodyshops and detailing salons, where it can be used repeatedly.

PACKAGING	
Unit	Collective
1 pcs.	6 pcs.



CLOSED-CELL STRUCTURE



DURABLE MATERIAL



REDUCED ABSORPTION OF THE APPLIED PRODUCT

PAINTING

HARD pad
M14 thread
dedicated for **FAST 1**, **MEDIUM 2** and **EASY** pastes



FAST 1

MEDIUM 2

EASY

PAINTING

SOFT pad
M14 thread
dedicated for **FINE 3**, **WAX 4** and **EASY** pastes



FINE 3

WAX 4

EASY



CLEANING
Hand washing



PAD DIAMETER
150 mm



PAD THICKNESS
50 mm



SPEED RANGE
600 to 2 600 rpm

O.C.F Pads



Polishing system

Profix open-cell polishing pads (O.C.F.) have been specially crafted for the most demanding painters and detailers. Using open-cell technology, these pads enhance cutting force while effectively dissipating heat from the polished coating. An additional advantage lies in the exceptional durability of the foam, reducing the load on the polishing machine. The fastening system is designed for longevity, featuring durable Velcro and foam.

The 125 mm spacer ensures highly comfortable working, thanks to its flexible disc base. Specifically designed for mechanical polishing, it accommodates various paint coatings with the option to use coarse polishing pastes.

PACKAGING	
Unit	Collective
1 pcs.	6 pcs.



OPENED-CELL
STRUCTURE



DURABLE
MATERIAL



4 TYPES OF
HARDNESS



STRONG VELCRO



CLEANING
Hand washing



PAD DIAMETER
150 mm



PAD THICKNESS
30 mm



SPEED RANGE
1100 to 1800 rpm

DETAILING

O.C.F VERY HARD

dedicated to **FAST 1** paste



FAST 1

DETAILING

O.C.F HARD

dedicated for **MEDIUM 2**, **FINE 3** pastes



MEDIUM 2

FINE 3

DETAILING

O.C.F SOFT

dedicated for **FINE 3**, **WAX 4** pastes



FINE 3

WAX 4

DETAILING

O.C.F MEDIUM

dedicated for **EASY** paste



EASY



BODY GUARD

new

Available colours



Bedliner
Hard protective structure

High-grade, two-part polyurethane enamel designed for areas where a tough coating is required, offering a distinct structural finish. Suitable for refined, semi-transparent painting processes, it boasts resilience against scratches and abrasion. Initially developed as a premium enamel for pickup truck cargo spaces, it is widely adopted as a 'custom finish' across various vehicle types, prioritizing both aesthetic appeal and scratch resistance. Its rapid curing, exceptional scratch resistance, and robust chemical resilience distinguish it in application.

PACKAGING	
Volume	Collective packaging
711 ml + 237 ml (hardener)	12 pcs. + 12 pcs.



DURABLE



HARD PROTECTIVE
STRUCTURE



SPRAY GUN
APPLICATION



ROLLER
APPLICATION



UV RESISTANCE



USED ON:

- pickup, truck beds
- bus floors
- bumpers
- frames
- off-road vehicles
- construction machinery



SPRAY VISCOSITY

25-30 sec. DIN Flow Cup 4mm



PAINT EFFICIENCY

2 m²/l (without thinner, thick coat)
max 10 m²/l (depends on amount
of thinner)



POT LIFE

1 hr



DRY FILM THICKNESS

Highly dependent on the
application method



MINIMUM SHELF LIFE

Body Guard: 24 months in originally
sealed packaging
Body Guard Hardener: 12 months
in originally sealed packaging



VOC

2004/42/WE/IIIB(e)(840)<840



SUBSTRATE PREPARATION

For existing paint layers: Begin by degreasing using silicone remover **CP 015**, followed by sanding with **240-320** abrasive paper, and another round of degreasing

For acrylic or epoxy primers: Start with degreasing using silicone remover **CP 015**, proceed with sanding using **240-320** abrasive paper, and then degrease once more. When utilizing the **CP 394** epoxy primer, it permits the application of **Body Guard** coating without sanding for up to 12 hours post-epoxy primer application

IMPORTANT: Apply on epoxy primer with an approximate 1-hour evaporation time at **20°C**

Steel, galvanized steel, aluminum, stainless steel: Sand with **240-320** abrasive paper and coat with epoxy primer **CP 394**

Polyester laminates: Degrease using silicone remover **CP 015**, sand using **240-280** abrasive paper, and repeat the degreasing process



MIXING RATIO

BLACK

Body Guard - 711ml
Body Guard Hardener - 237ml
Acrylic thinner **CP 040/ CP 070/ CP 075** - 0-40%

Blend the product with the hardener at a volume ratio of 3:1 and ensure thorough mixing. For the prepared mixture, the product can be diluted by a maximum of **40%** (using acrylic thinner), depending on the application method

TRANSPARENT

Body Guard - 711m mix with
+ **7-10%** (50-75g) **ACRYL/LV CRYL/Simplex**
Body Guard Hardener - 237ml
Acrylic thinner **CP 040/ CP 070/ CP 075** - 0-40%

Fill the bottle with your chosen colourant (acrylic (**ACRYL/LV CRYL**) or **Simplex** pigment), aiming for **7-10%** (50-75 g). Seal and shake the bottle well until the colour is consistent. Add the hardener (3:1 volume ratio) to the already coloured **Body Guard**. Seal and thoroughly mix for about 2 minutes. For application flexibility, you can dilute the prepared mixture by up to **40%** using acrylic thinner

PROCESS

PROCESS



APPLICATION:

OPTIONS	UBS SPRAY GUN	GRAVITY FEED CONVENTIONAL SPRAY GUN	ROLLER-BRUSH
Thinner	0-10%	10-40%	0-40%
Nozzle	4-6 mm	1,6-1,8 mm	-
Pressure	2,5-3 bar	2 bar	-
Distance from the element	30-40 cm	25-30 cm	-
Number of layers	2-3	2-3	2-3
Evaporation	40-45 min	40-45 min	40-45 min
Touch dry	at 20°C: 45-55 min	at 20°C: 45-55 min	at 20°C: 45-55 min
Curing	36-48 hrs	36-48 hrs	36-48 hrs
Full mechanical and chemical resistance	7 days	7 days	7 days
Pot life of the mixture	at 20°C: 1 hr	at 20°C: 1 hr	1 hr
NOTE	Possibility of obtaining different structure thicknesses depending on the nozzle and thinning level	Possibility of obtaining different structure thicknesses depending on the nozzle and thinning level	-



RESISTANCES

- Brake fluid – 24 hrs no changes
- Engine oil – 24 hrs no changes
- Water – 24 hrs no changes
- Soap – 24 hrs no changes
- 10% ammonia - 7 hrs no changes
- 44% acetic acid - 7 hrs no changes
- Xylene – 15 min The surface will soften, after evaporation it will regain hardness
- Acetone – 5 min The surface will soften, after evaporation it will regain hardness
- Temperature resistance up to – 85°C





A582 (CP 582)

Available colours



1K structural paint

CP 582 Bumper is a one-component structural paint specifically formulated for the repair and refinishing of plastic components, including bumpers, mirror caps, and side moldings. With a remarkable versatility, the paint generally does not require the use of adhesion promoters or elastisicers on most plastics. Easy to use and resistant to scratches, Bumper ensures a reliable and efficient application.

Conveniently available in 1-Litre tins, **CP 582 Bumper** offers a practical solution for achieving a durable and aesthetically pleasing finish on various plastic parts.

PACKAGING	
Volume	Collective packaging
1 l	3 pcs.



FLEXIBLE



EASY TO APPLY



MULTI-PURPOSE
APPLICATION



1K PRODUCT



SCRATCH-
RESISTANT



SPRAY VISCOSITY

~48-50 sec. DIN Flow Cup 4 mm



RECOMMENDED SIZES FOR PAINT STRAINER

190 µm



PAINT EFFICIENCY

8-9 m²/l



POT LIFE

Product ready for spraying



DRY FILM THICKNESS

1 coat - 30-40 µm



MINIMUM SHELF LIFE

24 months in originally sealed packaging



VOC

2004/42/WE IIB(e) (840) 640



SUBSTRATE PREPARATION

The surface needs to be cleaned with **CP 015** and **CP 012** remover. **CP 390** is recommended for artificial repair technology.



MIXING RATIO

100 parts of **CP 582**
10-20% of thinner **CP 040/ CP 070/ CP 055/ CP 075**



SPRAY GUN SETTINGS

Nozzle size: **1.6-1.8 mm**;
Operating pressure: HVLP/RP **1.8-2.0 bar**



APPLICATION

2 coats



EVAPORATION TIME AFTER APPLICATION

5 min after coating at **20°C** and **65%** relative humidity



DRYING

Drying times at **20°C** and **65%** relative humidity:
- dust dryness: **10 min**
- non-tacking: **30 min**
- for assembly: **5 hrs**
- thoroughly: **12 hrs**

Drying times at **60°C** and **65%** relative humidity:
- for assembly: **20 min**



IR DRYING

~15 min

PROCESS

PROGRESS



UBS A325 (CP 325)

Available colours



Underbody protection agent

UBS CP 325 Car Chassis Protecting Agent is a robust solution forming a strong and flexible coat with a coarse texture, effectively resisting stone impacts. This **UBS** coating provides comprehensive protection against water, salt, petrol, and oils, while also offering soundproofing properties. Additionally, it can be over-painted with both 1K and 2K products.

CP 325 UBS requires no prior preparation and is ready for spraying once opened. Notably, the new and improved sealer significantly increases the shelf life of the product. This versatile protective agent is available in 1-kilogram tins, ensuring a practical and efficient application for car chassis protection

PACKAGING	
Volume	Collective packaging
1 kg	12 pcs.



SCRATCH-
RESISTANT



WEATHER-
RESISTANT



READY FOR
SPRAYING



LONG MIXTURE LIFE



ON-COAT
APPLICATION



POT LIFE

Ready-to-use product



DRY FILM THICKNESS

~200-300 µm



MINIMUM SHELF LIFE

12 months in originally sealed packaging



VOC

2004/42WE/IIb(e) (840) 560

PROCESS

PROGRESS



SUBSTRATE PREPARATION

2K acrylic primers and polyester putties:

abrade with **P240-P320**, then blow off and clean up

Epoxy primers:

up to 12 hours after application apply without sanding. After 12 hours, the primer should be sanded with **P320**, then blasted and cleaned

Steel:

degrease and grind with **P120**, then blast and clean

Plastics:

degrease with degreaser, tarnish with fibre and then blow and clean up

Polyester laminates:

degrease and dry grind with **P280**, then blast and clean up



SPRAY GUN SETTINGS

Dense mass spray gun: **3-4 mm**, pressure **3-4 bar**



APPLICATION

Shake the pack before use.

Apply **2-3** coats.

Apply **1K, 2K** paints after 1 hour



EVAPORATION TIME AFTER APPLICATION

5-10 min after coating at **20°C** and **65%** relative humidity



DRYING

Drying times at **20°C** and **65%** relative humidity:
~60-90 min



A998 (CP 998)

BLENDER Fade out binder

The Blender resin, a one-component formulation designed for vehicle bodywork, serves the specific purpose of harmonizing colour disparities between the basecoat used (such as **KAR-BON** or **GREEN-LINE**) and the existing basecoat on adjacent areas during localized touch-ups.

Upon application of the **CP 998** resin coat, a layer of shaded **PROFIX** basecoat is applied wet-on-wet. Thanks to the distinctive properties of **CP 998**, this process achieves a flawless transition without any imperfections at the border, rendering the shade difference invisible.

Offered in 1-Litre tins, this product provides an exacting solution for localized colour adjustments, ensuring seamless finishes in automotive bodywork.

PACKAGING	
Volume	Collective packaging
1 l	3 pcs.



EFFICIENT



WITHOUT THINNER



NO SANDING
REQUIRED



SMOOTH SURFACE



EASY TO APPLY



SPRAY VISCOSITY

17-19 sec. DIN Flow Cup 4 mm



RECOMMENDED SIZES FOR PAINT STRAINER

125-190 µm



POT LIFE

Product ready for spraying



DRY FILM THICKNESS

1 coat - 10 µm



MINIMUM SHELF LIFE

24 months in originally sealed packaging



VOC

2004/42WE/IIb(e) (840) 786



SUBSTRATE PREPARATION

Degrease the surface, matt the old coatings with a grey fleece (**P1200**) or a gold fleece (**P1500**) or, preferably, with a matt polish



SPRAY GUN SETTINGS

Nozzle size: **1.2-1.4 mm**;
Operating pressure: HVLP/RP **1.8-2.0 bar**



APPLICATION

1-2 coats on the surface before shading with basecoat. Apply the basecoat immediately after the resin application in order to prevent the resin coat from drying out

PROCESS

PROGRESS

PROGRESS



A999 (CP 999)

Fade out binder

The resin, a one-component formulation tailored for vehicle bodywork, serves a specific purpose: to harmonize colour disparities between the **Kar-Bon/Green-Line** basecoat used and the existing basecoat on adjacent areas during local touch-ups.

After the application of the **CP 999** resin coat, a layer of shaded **Kar-Bon/Green-Line** basecoat is applied wet-on-wet. The unique properties of **CP 999** ensure a seamless transition without any visible "clouding" at the border, rendering the shade difference invisible.

Available in 1-Litre tins, this product provides a precise solution for localized colour adjustments, maintaining a flawless finish in automotive bodywork.

PACKAGING	
Volume	Collective packaging
1 l	3 pcs.



EFFICIENT



NO SANDING
REQUIRED



SMOOTH SURFACE



EASY TO APPLY



SPRAY VISCOSITY

17-19 sec. DIN Flow Cup 4 mm



RECOMMENDED SIZES FOR PAINT STRAINER

125-190 µm



POT LIFE

Product ready for spraying



DRY FILM THICKNESS

1 coat - 10 µm



MINIMUM SHELF LIFE

24 months in originally sealed packaging



VOC

2004/42WE/IIIB(e) (840) 707



SUBSTRATE PREPARATION

Degrease the surface, matt the old coatings with a grey or golden fleece, preferably, with a matt polish



MIXING RATIO

100 parts of **CP 999**
100 parts of thinner
CP 048/ CP 078/ CP 055



SPRAY GUN SETTINGS

Nozzle size: **1.2-1.4 mm**;
Operating pressure: HVLP/RP **1.8-2.0 bar**



APPLICATION

1-2 coats on the surface before shading with basecoat. Apply the basecoat immediately after the resin application in order to prevent the resin coat from drying out

PROCESS

PROGRESS

PROGRESS



A480 (CP 480)

Accelerator

The **Accelerator** is a specialized product engineered to expedite drying times, but will reduce the pot life of the mixed products. Specifically formulated for two-component **Acryl** primers, paints, and clearcoats, it significantly enhances the drying process.

It's crucial to note that exceeding a 5% addition of **Accelerator** can lead to a reduction in gloss. Available in volumes of 0.25, 0.5, and 1-Litre containers, this product provides options tailored to various project requirements and quantities.

PACKAGING	
Volume	Collective packaging
0.25 l	10 pcs.
0.5 l	6 pcs.
1 l	6 pcs.



SHORT DRYING
TIME



NO IMPACT ON
COLOUR CHANGE



MULTI-PURPOSE
APPLICATION



1K PRODUCT



SPRAY VISCOSITY

17-23 sec. DIN Flow Cup 4 mm



RECOMMENDED SIZES FOR PAINT STRAINER

190 µm



PAINT EFFICIENCY

according to the method and the
colour



POT LIFE

For 5% CP 480, 20°C and 65% RH:

- CP 400 + CP 285 + CP 480: 1 hr
- CP 1500 + CP 285 + CP 480: 45 min
- CP 1500 + CP 282 + CP 480: 40 min
- CP 2014 + CP 3114 + CP 480: 1 hr
- CP 2014 + CP 3214 + CP 480: 1 hr
- CP 2016 + CP 3016 + CP 480: 1 hr
- CP 365 + CP 285 + CP 480: 35 min
- ACRYL+ CP 285 + CP 480: 40 min
- LV CRYL+ C85H + CP 480: 30 min



MINIMUM SHELF LIFE

24 months in originally sealed
packaging



MIXING RATIO

maximum of **5%** in relation to the volume
of the mixture



SPRAY GUN SETTINGS

Nozzle size: **1.2-1.4 mm**;
Operating pressure: HVLP/RP **1.8-2.0 bar**



APPLICATION

according to the method



EVAPORATION TIME AFTER APPLICATION

~3-4 min after coating at **20°C**
and **65%** relative humidity

PROCESS

PROCESS



A490 (CP 490)

Elastic additive

The **Elastic Additive** serves a specific purpose in painting vehicle components constructed from flexible plastics. It's indispensable for 2K paints and primers that demand special additives. By incorporating **CP 490** into clearcoats and two-component primers, it enhances the coating's flexibility, effectively preventing cracks in the paintwork.

Available in 0.5- and 1-litre containers, this product offers flexibility in usage and application quantities to suit varied project needs.

PACKAGING	
Volume	Collective packaging
0.5 l	6 pcs.
1 l	6 pcs.



IMPROVE
FLEXIBILITY



PREVENTS
FORMATION OF
CRACKS



EXTENDS THE DRYING
TIME OF THE PAINTED
COATING



POT LIFE
Ready-to-use product



APPLICATION
- acrylic primer
- clearcoat
CP 490 is particularly suitable
for fast-drying products (**CP 365**,
CP 375, **CP 1800**, **CP 2015**)



MINIMUM SHELF LIFE
24 months in originally sealed
packaging

PROCESS

PROGRESS



MIXING RATIO

100 parts of primer or of acrylic clearcoat
20-50 parts of **CP 490** (thinner not to be
added)



SPRAY GUN SETTINGS

According to method



APPLICATION

According to method



DRYING

Special attention must be paid to
high temperatures when drying
plastic parts. Addition of **CP 490**
extends the drying process

Paint cups



The **Profix cups** present a disposable cup system tailored for primers and paints, strategically designed to maximize painting efficiency. This innovative system significantly reduces cleaning time and minimizes the need for cleaning agents. It allows for mixing, spraying, and storage of paint within a single kit and offers various adapters compatible with most spray guns for added versatility.

PACKAGING	
Volume	Collective packaging
flat lid 300, 500, 750, 1000 ml	100 pcs.
paint cup 300, 500, 750, 1000 ml	300 pcs.
lid with sieve 300, 500, 750, 1000 ml	50 pcs.
adapters	1 pc.



VARIOUS VOLUMES



EASY
WORKFLOW



MULTI-PURPOSE
APPLICATION



LIFE SPAN
disposable



APPLICATION
300 ml - spot repairs
500 ml - minor repairs
750 ml - medium repairs
1000 ml - major repairs

PROCESS



STEP 1
install the appropriate
adapter on the spraying gun



STEP 2
pour the products one by
one into the cup



STEP 3
place and cap the sieve




STEP 4
turn the gun 180 degrees
and push it onto the sieve
opening




STEP 5
spray



STEP 6
dismantle the cup from the
spraying gun



STEP 7
push the stopper onto
the opening of the cup to
prevent the contents from
evaporating



STEP 8
to save space; the cups
can be stacked using a
flat lid

PROCESS

PROCESS

Abrasives



The **Profix abrasives** are premium-grade products tailored for professional sanding tasks. Specifically designed for sanding epoxy and acrylic coatings as well as removing old paintwork, these abrasives are optimized for mechanical grinders with integrated dust extraction systems. Moreover, they seamlessly complement tools compatible with dust extraction system attachments.

Crafted with a film-glued disc, these abrasives maintain their shape without deformation, ensuring exceptional durability throughout extended use.

PACKAGING	
Gradation	Collective packaging
P40, P60	50 pcs.
P80, P120, P150, P180, P220, P240, P280, P320, P360, P400, P500, P600, P800, P1000, P1200, P1500, P2000	100 pcs.



HIGH DURABILITY
AND PAINT
EFFICIENCY



WIDE RANGE OF
GRADATIONS



VARIOUS
SUBSTRATES



LIFE SPAN

reusable



APPLICATION

P40/ P60/ P80/ P120/ P150/ P180/ P220/ P240 - substrate preparation for primers, preparatory work, substrate preparation, stripping of old coatings, corrosion removal, putty work, sanding of old coatings


P280/ P320/ P360/ P400/ P500/ P600/ P800 - treatment of primers and old coatings for the purpose of topcoats preparation

P1000/ P1200/ P1500/ P2000 - removal of paint defects, runs, contamination and preparation for polishing with the **PROFIX POLISHING SYSTEM**



ADJUSTMENT

compatible with multiple grinding systems (Velcro)

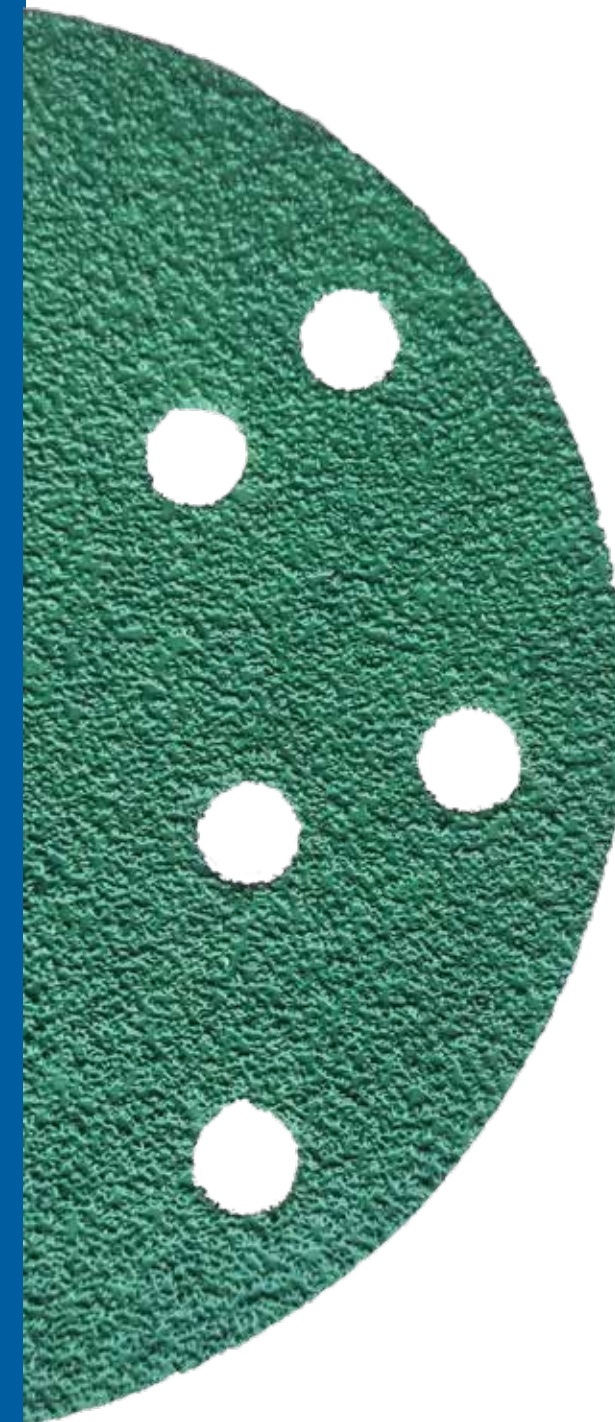



Six reasons
to have
a better colour

Spectrophotometer A6

The **A6** has a compact, lightweight design, is easy to use, and allows for quick colour measurement and identification. This spectrophotometer is an ideal solution for identifying colours (including tri-coats) in car repairs, commercial vehicles, and industrial applications.

It is the most technologically advanced 5-angle spectrophotometer on the market - perfect for busy paint shops and mixing rooms where colour precision is essential. The device features a camera, LED lighting, works on curved surfaces, and includes a built-in thermometer.

The spectrophotometer is a key part of the **Profix Refinish System** - measurements can be wirelessly sent to the Cloud app, where they can be adjusted before sharing. A broad and constantly expanding colour database forms the foundation of the correction algorithm, directly affecting its accuracy.

Content

spectrophotometer | docking station | calibration panel | USB type C cable
spare gasket | protective film | stylus | licence (USB flash drive)



CAMERA



DOCKING STATION



LIGHT WEIGHT



WIDE RANGE OF
RECIPES



5 ANGLES



WIFI



CORRECTION
FUNCTION



CLOUD
APPLICATION



WEATHER CONDITIONS OF EMPLOYMENT

10°C to 35°C



STORAGE CONDITIONS

-20°C to 50°C
relative humidity max. 85%



MEASUREMENT TIME

< 3.5 sec.



BATTERY LIFE

One full day capacity with maximum
daily workload:

8h shift

20 car repairs (average interval
~20 min)

5 measurements per job



DEVICE MEMORY

Up to 20 measurements per job

Default per job: 5 measurements
with 5 directional images each
(25 MB)

Total storage capacity: 4 GB,
corresponds to 160 jobs.



CALIBRATION OF THE INSTRUMENT

every 28 days




STEP 1

clean and polish the
measuring site



STEP 2

select **New Job** from the
menu



STEP 3

at the top of the screen,
select **Add job**



STEP 4

apply the **A6** to the surface
to be measured, take 3-5
measurements




STEP 5

the device must remain
immobile during
measurements



STEP 6

enter the name of the order



STEP 7

save the order



STEP 8

transfer the measurement
to **PROFIX** software

COLOUR

MEASUREMENT

HARDENER OPTIONS

SPECIFICATION	H282 (CP 282)	H285 (CP 285)	H286 (CP 286)	
Hardener	fast	standard	slow	
Temperature of use	10-20°C	15-25°C	25-35°C	
Product compatibility	C1500 (CP 1500) / CM 10 / Acryl / P399 (CP 399)/ P363 (CP 363) / P385 (CP 385) / P365 (CP 365) / C400 (CP 400) / C500 (CP 500) / P388 (CP 388) / P375 (CP 375) / CP 370 DTM			
Pros	● eliminating the need for separate formulations ● reduced complexity ● ensuring consistency in the final product ● less chance for variability in the hardening process ● using one hardener can potentially reduce costs associated with purchasing, storing, and handling multiple hardeners			
Effect on the product	 SMOOTHER SURFACE	 EASIER AND MORE EFFICIENT SANDING	 ADAPTABILITY TO ATMOSPHERIC CONDITIONS NOT ONLY BY CHANGING THINNERS	 NONE OF THE TESTED PARAMETERS PERFORMED WORSE

Hardeners

Table

Symbol	Name	Packaging		Use for:	Mixing ratio	Use at ambient temperature [°C]
		Unit	Collective			
H208 (CP 208)	Hardener HS	500 ml	6 pcs.	C2008 (CP 2008 HS)	2:1	15-25
		2,5 L	4 pcs.			
H208 S (CP 208 S)	Hardener HS slow	500 ml	6 pcs.	C2008 (CP 2008 HS)	2:1	25-35
		2,5 L	4 pcs.			
H218 (CP 218)	Hardener MS "air dry" very fast	250 ml	10 pcs.	C400 (CP 400 MS), C1500 (CP 1500 MS), Acrylic, P375 (CP 375)	2:1	10-20
		500 ml	6 pcs.			
		1 L	5 pcs.			
		2,5 L	4 pcs.			
H245 (CP 245)	Hardener	500 ml	6 pcs.	P595 (CP 595)	2:1	15-25
H269 (CP 269)	Hardener	500 ml	6 pcs.	C1800 (CP 1800)	2:1	10-20
		2,5 L	4 pcs.			
H282 (CP 282)	Hardener MS fast	250 ml	10 pcs.	C400 (CP 400 MS), C500 (CP 500 HS), C1500 (CP 1500 MS), CM 10, Acryl, P363 (CP 363), CP 365, P375 (CP 375), P385 (CP 385), P388 (CP 388), P399 (CP 399)	2:1	10-20
		500 ml	6 pcs.		4:1	
		1 L	6 pcs.		5:1	
		2,5 L	4 pcs.			
		5 L	4 pcs.			
H285 (CP 285)	Hardener MS	150 ml	10 pcs.	C400 (CP 400 MS), C500 (CP 500 HS), C1500 (CP 1500 MS), CM 10, Acryl, P363 (CP 363), P365 (CP 365), P375 (CP 375), P385 (CP 385), P388 (CP 388), P399 (CP 399)	2:1	15-25
		200 ml	10 pcs.			
		250 ml	10 pcs.		4:1	
		500 ml	6 pcs.		5:1	
		1 L	6 pcs.			
		2,5 L	4 pcs.			
H286 (CP 286)	Hardener MS slow	5 L	4 pcs.	C400 (CP 400 MS), C500 (CP 500 HS), C1500 (CP 1500 MS), CM 10, Acryl, P363 (CP 363), P365 (CP 365), P375 (CP 375), P385 (CP 385), P388 (CP 388), P399 (CP 399)	2:1	25-35
		500 ml	6 pcs.		4:1	
		1 L	6 pcs.		5:1	
		2,5 L	4 pcs.			
H294 (CP 294)	Hardener	0,8 L	6 pcs.	P394 (CP 394 HS)	1:1	15-25
H3014 (CP 3014)	Hardener UHS	250 ml	10 pcs.	C2014 (CP 2014 UHS)	4:1	15-25
		1 L	6 pcs.			
H3015 (CP 3015)	Hardener HS	500 ml	6 pcs.	C2015 (CP 2015 HS)	2:1	15-25
		2,5 L	4 pcs.			
H3016 (CP 3016)	Hardener VHS	250 ml	10 pcs.	C2016 (CP 2016 VHS)	4:1	15-25
		1 L	6 pcs.			
H3014 S (CP 3114)	Hardener UHS slow	250 ml	10 pcs.	C2014 (CP 2014 UHS)	4:1	25-35
		1 L	6 pcs.			
H3014 F (CP 3214)	Hardener UHS fast	250 ml	10 pcs.	C2014 (CP 2014 UHS)	4:1	10-20
		1 L	6 pcs.			
H3016 F (CP 3216)	Hardener VHS fast	250 ml	10 pcs.	C2016 (CP 2016 VHS)	4:1	10-20
		1 L	6 pcs.			
H 004	Hardener	500 ml	6 pcs.	B 004	4:1	15-25
C85H	Hardener	500 ml	6 pcs.	LV CRYL	2:1	15-25
		1 L	6 pcs.			
		2,5 L	4 pcs.			
C86H	Hardener slow	500 ml	6 pcs.	LV CRYL	2:1	25-35

Thinners

Table

Symbol	Name	Packaging		Type	Use for	Use at ambient temperature [°C]
		Unit	Collective			
T010 (CP 010)	Waterborne thinner	500 ml	11 pcs.	waterborne	A26	15-25
		1 L	6 pcs.			
		5 L	3 pcs.			
T032 (CP 032)	Putty thinner	1 l	6 pcs.	for spray putty	B332 (CP 332)	15-25
T040 (CP 040)	Acrylic thinner	500 ml	6 pcs.	2K	P388 (CP 388), P399 (CP 399), P385 (CP 385), C2016 (CP 2016), C2014 (CP 2014), C1800 (CP 1800), C2015 (CP 2015), C1500 (CP 1500), C400 (CP 400), C500 (CP 500) Acryl, CP 365, C2008 (CP 2008), CM 10, P363 (CP 363), P375 (CP 375), P394 (CP 394)	15-25
		1 L	6 pcs.			
		5 L	4 pcs.			
T041 (CP 041)	Acrylic thinner	5 L	4 pcs.	2K	P388 (CP 388), P399 (CP 399), P385 (CP 385), C2016 (CP 2016), C2014 (CP 2014), C1800 (CP 1800), C2015 (CP 2015), C1500 (CP 1500), C400 (CP 400), C500 (CP 500) Acryl, CP 365, C2008 (CP 2008), CM 10, P363 (CP 363), P375 (CP 375), P394 (CP 394)	
T044 (CP 044)	Thinner slow HS	1 L	6 pcs.		all clearcoats	
		5 L	4 pcs.			
T048 (CP 048)	Base thinner	500ml	6 pcs.	1K	GREEN-LINE, KAR-BON, Black Plus, JetBlack, SilverLine	15-25
		1 L	6 pcs.			
		5 L	4 pcs.			
T055 (CP 055)	Multipurpose	1 L	6 pcs.	1K/2K	GREEN-LINE, KAR-BON, Black Plus, JetBlack, SilverLine, Acryl, for all primers, for all clearcoats	
		5 L	4 pcs.			
T070 (CP 070)	Acrylic thinner	1 L	6 pcs.	2K	P388 (CP 388), P399 (CP 399), P385 (CP 385), C2016 (CP 2016), C2014 (CP 2014), C1800 (CP 1800), C2015 (CP 2015), C1500 (CP 1500), C400 (CP 400), C500 (CP 500) Acryl, P365 (CP 365), C2008 (CP 2008), CM 10, P363 (CP 363), P375 (CP 375), P394 (CP 394)	25-35
		5 L	4 pcs.			
T075 (CP 075)	Acrylic thinner	1 L	6 pcs.	1K/2K	P388 (CP 388), P399 (CP 399), P385 (CP 385), C2016 (CP 2016), C2014 (CP 2014), C1800 (CP 1800), C2015 (CP 2015), C1500 (CP 1500), C400 (CP 400), C500 (CP 500) Acryl, P365 (CP 365), C2008 (CP 2008), CM 10, P363 (CP 363), P375 (CP 375), P394 (CP 394)	
		5 L	4 pcs.			
T078 (CP 078)	Base thinner	1 L	6 pcs.	1K	GREEN-LINE, KAR-BON, Black Plus, JetBlack, SilverLine	25-35
		5 L	4 pcs.			

Primers

Table

Symbol	Name	Type	Packaging		Mixing ratio	Hardener	Number of coats	Dilution	Thinner	Pot life	Paint efficiency m²/l	Film thickness	Spray viscosity
			Unit	Collective									
P595 (CP 595)	WASH PRIMER	2K	1 L	3 pcs.	2:1	H245 (CP 245)	1	-	-	48 h	14-15	5-10	15-17
P394 (CP 394)	EPOXY PRIMER	2K	0.8 l	6 pcs.	1:1	H294 (CP 294)	1-2	10-30%	T040 (CP 040)/ T070 (CP 070)/ T055 (CP 055)/ T075 (CP 075)	1 h	8-10	20-40	16-22
P390 (CP 390)	PLASTIC PRIMER	1K	0.5 l	6 pcs.	-	-	1	-	-	-	8-9	5-10	10-12
			1 l	6 pcs.									
P363 (CP 363)	MULTI SEALER PRIMER	2K	0.8 l	6 pcs.	4:1	H282 (CP 282)/ H285 (CP 285)/ H286 (CP 286)	1	30%	T040 (CP 040)/ T070 (CP 070)/ T055 (CP 055)/ T075 (CP 075)	1 h	8-9	10-20	15-17
P385 (CP 385)	WET-ON-WET PRIMER	2K	1 L	6 pcs.	4:1	H282 (CP 282)/ H285 (CP 285)/ H286 (CP 286)	1	25-50%	T040 (CP 040)/ T070 (CP 070)/ T055 (CP 055)/ T075 (CP 075)	1 h	10-12	20-30	21-25
			3,5 L	2 pcs.									
P388 (CP 388)	HIGH BUILD PRIMER	2K	0.75 l	6 pcs.	5:1	H282 (CP 282)/ H285 (CP 285)/ H286 (CP 286)	1-3	20-25%	T040 (CP 040)/ T070 (CP 070)/ T055 (CP 055)/ T075 (CP 075)	1 h	7	70-80	35-55
			5 l (grey)	4 pcs.									
P399 (CP 399)	HYBRID HB PRIMER	2K	1 l	3 pcs.	4:1	H282 (CP 282)/ H285 (CP 285)/ H286 (CP 286)	1	10%	T040 (CP 040)/ T070 (CP 070)/ T055 (CP 055)/ T075 (CP 075)	1.5 h	7-8	130-140	22-25
			3.5 l	2 pcs.									
P375 (CP 375)	SWIFT PRIMER	2K	1 l	6 pcs.	4:1	H282 (CP 282)/ H285 (CP 285)/ H286 (CP 286)	1-2	10-30%	T040 (CP 040)/ T070 (CP 070)/ T055 (CP 055)/ T075 (CP 075)	1 h	8-10	40-50	24-26 12-16
			3.5 l	2 pcs.									
P365 (CP 365)	EXPRESS PRIMER	2K	0.8 l	3 pcs.	4:1	H282 (CP 282)/ H285 (CP 285)/ H286 (CP 286)	1-2	20-40%	T040 (CP 040)/ T070 (CP 070)/ T055 (CP 055)/ T075 (CP 075)	1 h	7-9	50-60	22-30
			3.5 l	2 pcs.									

Body Fillers

Table

Symbol	Name	Packaging		Mixing ratio	Method of application	Paper grit coarse sanding	Paper gradation finish grinding	Ease of sanding [1 to 5 scale]	Pot life	Drying time at 20C	Drying time at 60C	Colour	Thinner
		Unit	Collective										
B332 (CP 332)	Finish Spray polyester putty	1 kg	6 pcs.	100 4.5 10	spray gun	P180-P240	P280-P360	5	30-40 min	2-3	25-30	grey	CP 032
B333 (CP 333)	Universal	2 kg	4 pcs.	100 1-3.5	spatula	P80-P120	P120-P240	4	5 min	20-30	5	olive	-
B334 (CP 334)	Soft Plus	1 kg	4 pcs.	100 1-3.5	spatula	P100-P120	P120-P280	5	5 min	20-30	5-10	yellow	-
		1.8 kg	4 pcs.										
B335 (CP 335)	Metallic	1 kg	4 pcs.	100 1-3.5	spatula	P100-P120	P120-P280	4	5-7	20-30	5-10	grey	-
B336 (CP 336)	Glass	1 kg	4 pcs.	100 1-3.5	spatula	P80-P150	-	3	5-6	20-30	5-10	green	-
		1.8 kg	4 pcs.										
B339 (CP 339)	Perfectly Light	1 l	4 pcs.	100 1-3.5	spatula	P100-P180	P180-P280	5	7-8	20-30	10-12	olive	-
B341 (CP 341)	Plastic	1 kg	4 pcs.	100 1-3.5	spatula	P100-P120	P120-P320	5	3-4	20-30	-	black	-
B342 (CP 342)	Hot Rod	1 l	4 pcs.	100 1-3.5	spatula	P100-P180	P180-P280	5	6-7	30-35	9-11	olive	-

Clearcoats

Table


Symbol	Name	Type	Packaging		Mixing ratio	Hardeners	Number of coats	Dilution	Thinner	Pot life	Paint efficiency m²/l	Film thickness	Spray viscosity
			Unit	Collective									
C400 (CP 400)	ESSENTIAL CLEAR	MS	1 l	6 pcs.	2:1	H282 (CP 282)/ H285 (CP 285)/ H286 (CP 286)	2-3	10%	T040 (CP 040)/ T070 (CP 070)/ T055 (CP 055)/ T075 (CP 075)	6 h	7	50-60	18-22
			5 l	4 pcs.									
C500 (CP 500)	SELECT CLEAR	HS	1 l	6 pcs.	2:1	H282 (CP 282)/ H285 (CP 285)/ H286 (CP 286)	2-3	10%	T040 (CP 040)/ T070 (CP 070)/ T055 (CP 055)/ T075 (CP 075)	6 h	7	50-60	18-22
			5 l	4 pcs.									
C1500 (CP 1500)	PRIME CLEAR	MS	1 l	6 pcs.	2:1	H282 (CP 282)/ H285 (CP 285)/ H286 (CP 286)	2	20%	T040 (CP 040)/ T070 (CP 070)/ T055 (CP 055)/ T075 (CP 075)	6 h	7	60-70	15-16
			5 l	4 pcs.									
C1800 (CP 1800)	ROCKET CLEAR	HS	1 l	6 pcs.	2:1	H269 (CP 269)	2	10-20%	T040 (CP 040)/ T070 (CP 070)/ T055 (CP 055)/ T075 (CP 075)				
			5 l	4 pcs.									
C2008 (CP 2008)	PRESTIGE CLEAR	HS	1 l	6 pcs.	2:1	H208 (CP 208)/ H208 F (CP 208 F)/ H208 S (CP 208 S)	1.5-2	2,5-10%	T040 (CP 040)/ T070 (CP 070)/ T055 (CP 055)/ T075 (CP 075)	1 h	7	60-70	18-22
			5 l	4 pcs.									
C2014 (CP 2014)	SUPREME CLEAR	UHS	1 l	6 pcs.	4:1	H3014 (CP 3014)/ H3024 F (CP 3024 F)/ H3024 S (CP 3024 S)	1.5-2	0-10%	T040 (CP 040)/ T070 (CP 070)/ T055 (CP 055)/ T075 (CP 075)	1 h	8-9	70-80	18-22
			4 l	4 pcs.									
C2015 (CP 2015)	X-SPEED CLEAR	HS	1 l	6 pcs.	2:1	H3015 (CP 3015)/ H3015 S (CP 3015 S)	1.5-2	-	-	0.5 h	8-10	40-70	16-20
			5 l	4 pcs.									
C2016 (CP 2016)	DIAMOND CLEAR	VHS	1 l	6 pcs.	4:1	H3016 (CP 3016)/ H3016 F (CP 3016 F)/ H3016 S (CP 3016 S)	1.5-2	0-10%	T040 (CP 040)/ T070 (CP 070)/ T055 (CP 055)/ T075 (CP 075)	1 h	8-10	80	15-19
			5 l	4 pcs.									
CM 10	MATT CLEAR	MS	1l	6 pcs.	2:1	H282 (CP 282)/ H285 (CP 285)/ H286 (CP 286)	2	10-20%	T040 (CP 040)/ T070 (CP 070)/ T055 (CP 055)/ T075 (CP 075)	2 h	7	50-60	18-22
			5 l	4 pcs.									

Products coding

How to read the production batch number


I. PRODUCTS PRODUCED UNTIL 06.2022

PRODUCT CODE


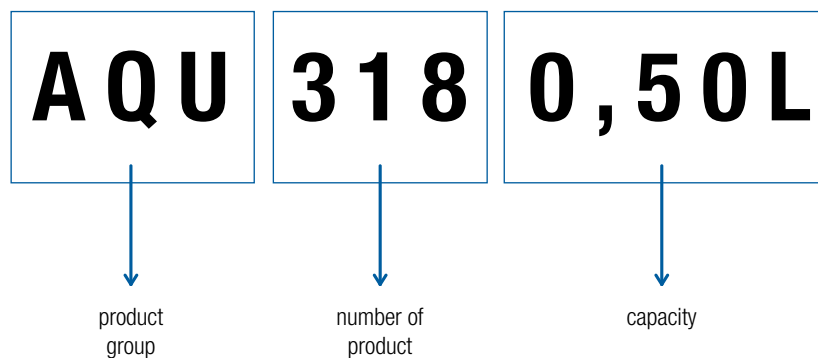


II. PRODUCTS PRODUCED AFTER 06.2022

PRODUCT CODE

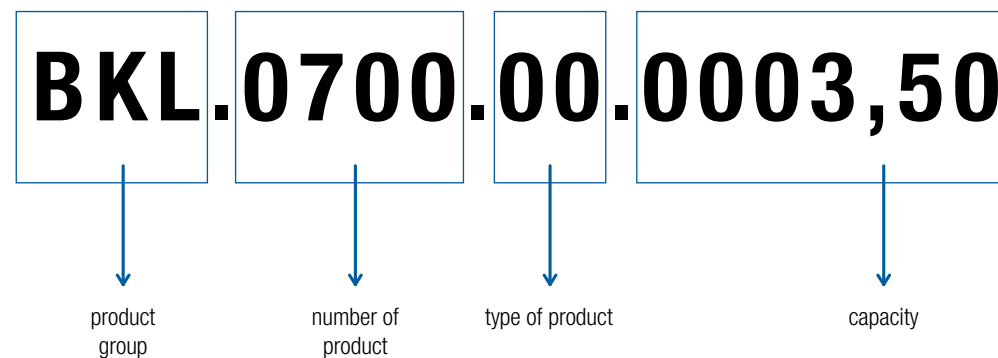

BATCH NUMBER

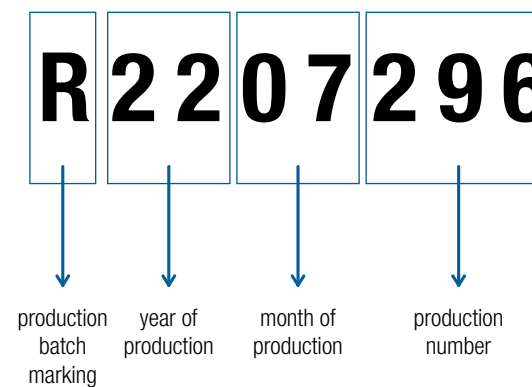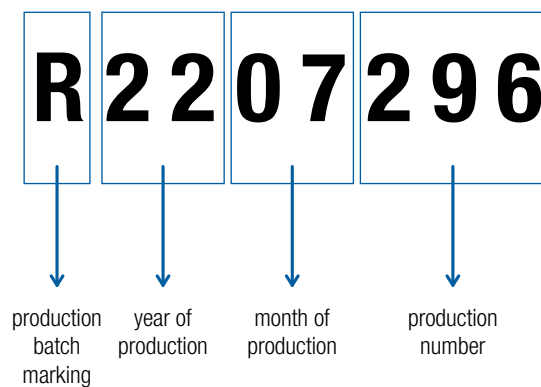

Notes

[illegible]

Notes

This image shows a blank sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



Multichem Sp. z o.o.
ul. Przemysłowa 2
PL 62-030 Luboń
tel. +48 61 893 37 31

www.multichem.pl